





DRAWING NO		REV.	A0
------------	--	------	----

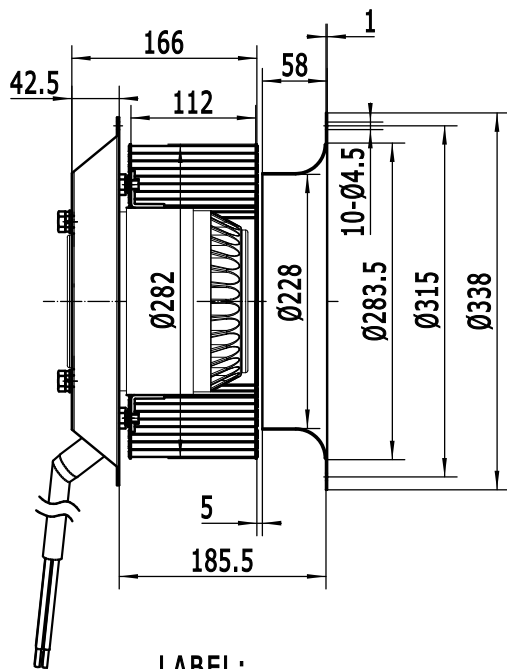


LABEL:



400V 50Hz 2.54A 1400W 1350r/min CL.F XX/XX

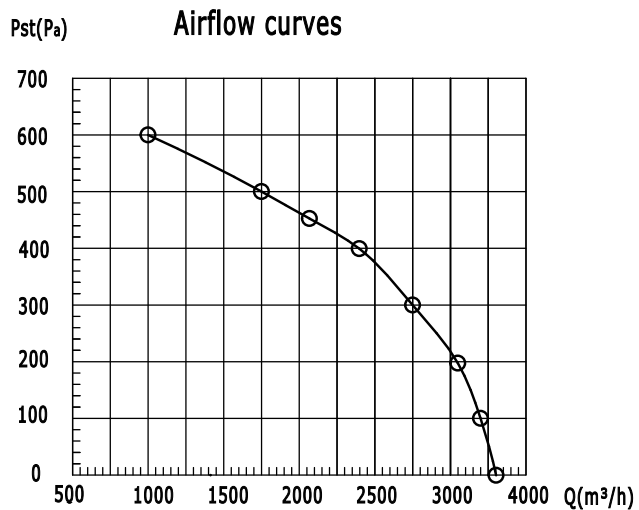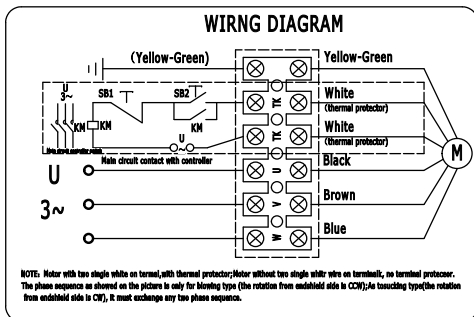

Rotation Direction

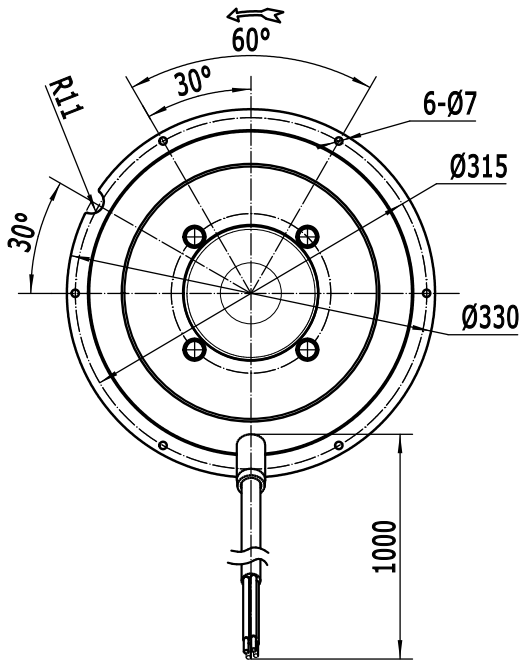

External Rotor Motor

Hangzhou Weiguang Electronic Co.,Ltd.

Unit: External Rotor Motor

Type:

Motor: Three phase motor

Customer:

Motor type: LXFF4D280/112-M168/50-AB02

Customer-type:

Voltage V	Frequency Hz	Input power W	Current A	Speed r/min	Capacitor μ F/ V _{AC}	Remarks OPa
400	50	1400	2.54	1350		With Housing

Insulation class : F

Operating type: S₁

Permissible ambient temperature : -30℃~60℃

Temperature increase:

Motor protection:thermocontact 150±5℃

Bearings: ball bearings

Model meanings:

LXFF4D 280/112- M168/50- AB02

Centrifugal Fan
Forward
Motor poles
Three Phase
The diameter of the impeller
The thickness of impeller

— Item

- The thickness of laminated core
- The diameter of the rotor
- Metal

Electrical connection:lead wire Silikon 4*16AWG+2*20AWG , Length 1000±20mm

				DECIMAL	TOLERANCE		SIGN	DATE	TITLE LXFF4D280/112-M168/50-AB02	
				X	±0.5	DRN. BY	chunboliu	03/01-22		
				X.X	±0.25	CHD. BY			PROJECTION 	A4
				X.XX	±0.15	ENG. BY				SCALE
REV.	DESCRIPTION	APPROVED	DATE	ANGLE	±3°	APP. BY				SHEET: 1 of 1