
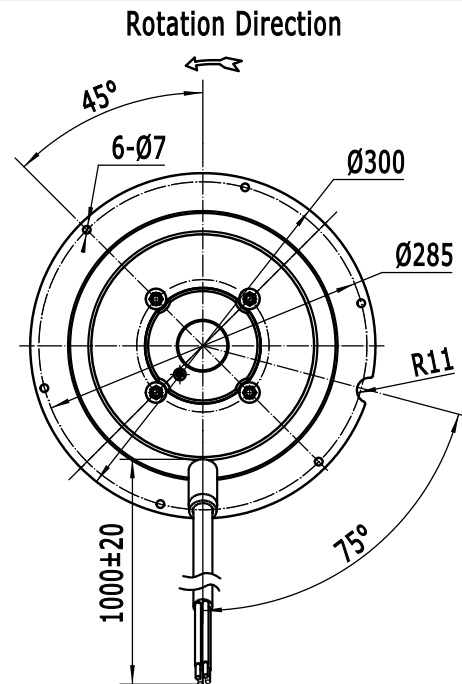


DRAWING NO		REV.	A0
------------	--	------	----


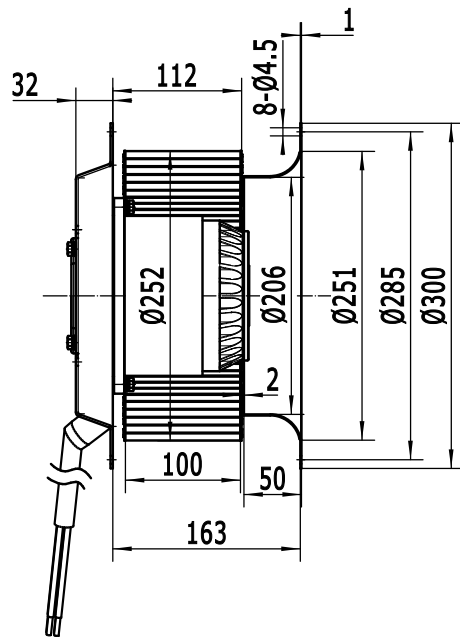


LABEL:

WEIGUANG®

LXFF4E250/100-M137/70-AA02

230V 50Hz 4.0A 910W 1390r/min 16uF/450V CL.F XX/XX

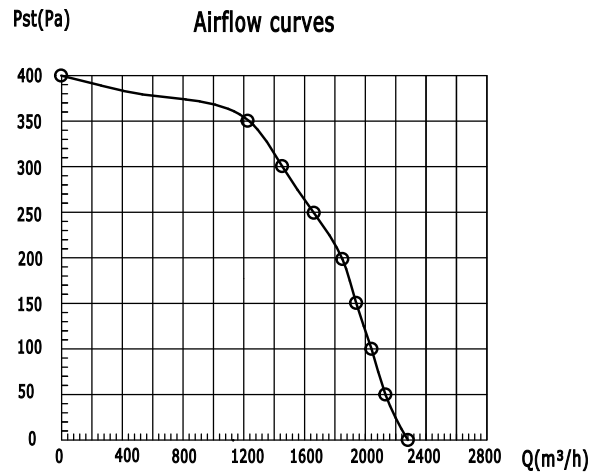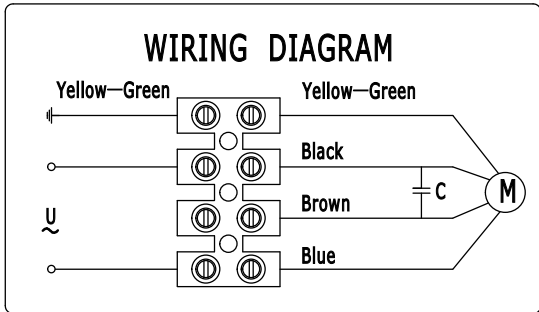

External Rotor Motor

Hangzhou Weiguang Electronic Co.,Ltd.

Unit: External Rotor Motor

Type:

Motor: single phase motor

Customer:

Motor type: LXFF4E250/100-M137/70-AA02

Customer-type:

Voltage V	Frequency Hz	Input power W	Current A	Speed r/min	Capacitor μ F/ V _{AC}	Remarks (OPa)
230	50	910	4.0	1390	16	With Housing

Insulation class : F

Operating type: S_I


Permissible ambient temperature : -30℃~60℃

Temperature increase:

Motor protection:thermocontact 150±5℃

Bearings: ball bearings

Model meanings:

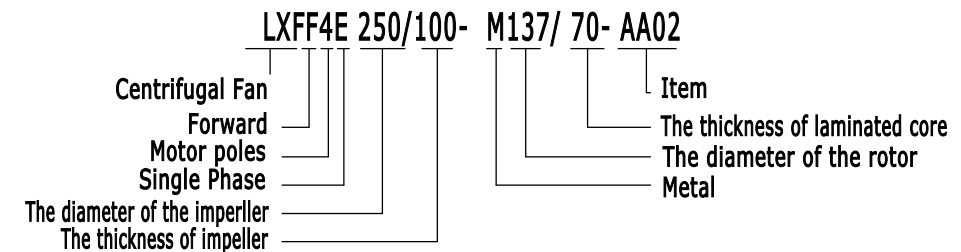

Electrical connection:lead wire Silikon 4*0.75mm² , Length 1000±20mm

REV.	DESCRIPTION	APPROVED	DATE	DECIMAL	TOLERANCE	DRN.BY	SIGN	DATE	TITLE	PROJECTION	A4
				X	±0.5	chunboliu		03/01-22	LXFF4E250/100-M137/70-AA02		SCALE
				X.X	±0.25						SHEET: 1 of 1
				X.XX	±0.15						
				ANGLE	±3°						